


INSTALLATION DRAWING DX 500 PREMIUM S

Single unit




- Ventilation shaft is mandatory. Minimum size: 200cm². Also possible on the side or on the back wall.
- 3 Overall dimensions (depth) body + closed door (protruding): **610mm**
- 2 Overall dimensions (width) with the door open including handle: **615mm**

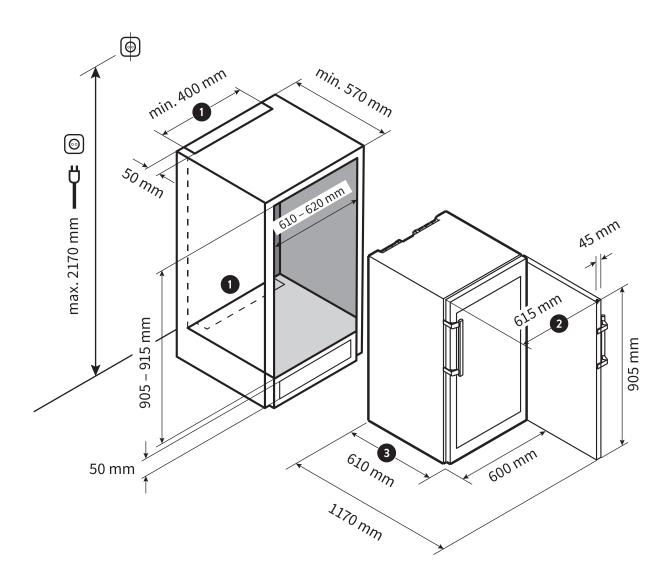

INSTALLATION DRAWING DX 500 PREMIUM S

Side by Side

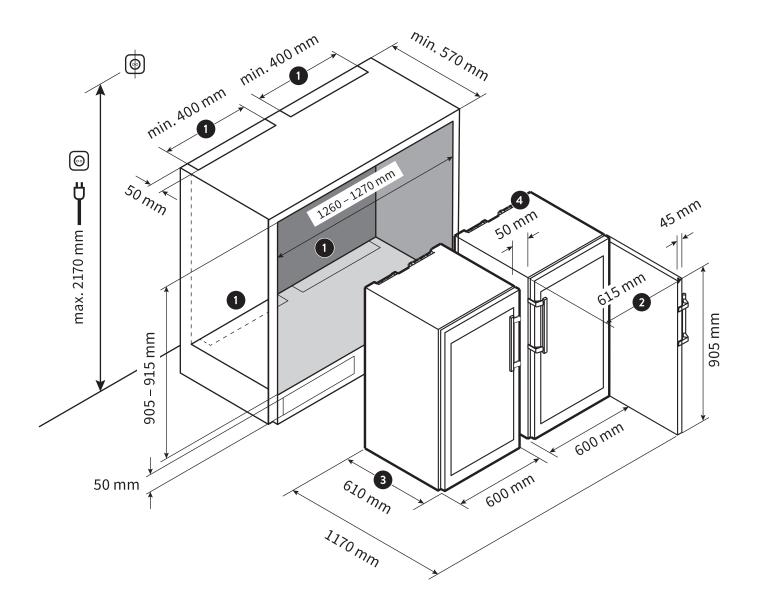


- Ventilation shaft is mandatory. Minimum size: 200cm². Also possible on the side or on the back wall.
- 3 Overall dimensions (depth) body + closed door (protruding): **610mm**
- 2 Overall dimensions (width) with the door open including handle: **615mm**
- Panelling of the intermediate gap with DRY AGER® stainless steel cover possible (DX0031).



INSTALLATION DRAWING DX 500 PREMIUM S

On Top

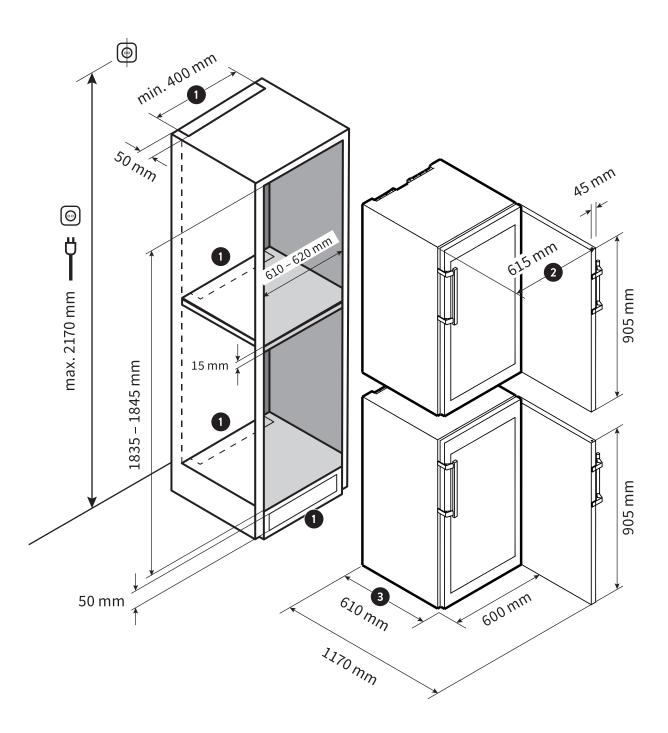

- Ventilation shaft is mandatory. Minimum size: 200cm². Also possible on the side or on the back wall.
- 3 Overall dimensions (depth) body + closed door (protruding): **610mm**
- 2 Overall dimensions (width) with the door open including handle: **615mm**